



Fall Protection



The World's First Retractable Horizontal Lifeline System.

Provides the Ultimate in Safety,
Ease-of-Use & Productivity!

3M™ DBI-SALA® EZ-Line™
Retractable Horizontal Lifeline System

www.3M.com/FallProtection

- Retractable lifeline is simply pulled out for installation and retracted with built-in handle to tension the line
- Customise your system length in any increment up to 18 m for complete jobsite flexibility
- Entire system stores in an easy to carry case - no more coils of unmanageable cable!
- Installation, removal and storage is the fastest in the industry, taking only seconds, providing ultimate worker productivity
- Built-in tension and impact indicators take the guess-work out of system set-up and service
- Extremely lightweight system is 33% lighter than conventional 18 m systems for increased ease-of-use
- Attaches to any 22 kN rated anchorage connector or stanchion for added versatility
- Provides hands-free horizontal mobility and continuous protection for 2 users per system
- ATEX approved model available

Increased Productivity

EZ-Line is the most user friendly horizontal lifeline system on the market today! Easy to install, remove and store, EZ-Line's innovative retractable design allows the user to quickly and efficiently set-up any length of system in only seconds and dismantle it just as quick. The entire 18 m EZ-Line system is retracted into an easy to carry case which eliminates large and bulky coils of cable that are difficult to set-up, relocate and store.

Additionally, EZ-Line weighs only 11.25 kg which is 33% lighter than traditional systems providing ease-of-use and added worker satisfaction.

Installation is completed in four simple steps;

- 1) Attach the lifeline with the carabiner to an anchorage connector,
- 2) Depress the locking button allowing cable to pay out and walk to the next anchorage,
- 3) Attach the housing/case with the carabiner to the anchorage connector,
- 4) Tension the lifeline with the built-in crank handle.

Continuous Protection

After installation the worker(s) is able to attach to the cable lifeline with their fall arrest system and begin work, fully protected. EZ-Line will provide complete horizontal mobility and hands-free fall protection for up to 2 users per system.

EZ-Line incorporates many features increasing jobsite safety. A built-in pre-tension indicator ensures the lifeline is correctly tensioned, minimising dangerous fall clearances.

In addition, the integrated impact indicator provides the user with a visual reference on whether the device has been subjected to a fall. EZ-Line is the safest horizontal lifeline system on the market today!

Complete Jobsite Flexibility

EZ-Line is fully versatile, you choose the system length in any increment up to 18 m. The remaining cable is simply left on the drum inside the housing/carrying case. In addition, EZ-Line can be anchored to a structure using any 22 kN rated anchorage connector such as fixed beam clamps, tie-off straps and HLL stanchions. EZ-Line provides the ultimate in jobsite versatility.

3M Fall Protection Business

Capital Safety Group (NE) Ltd
5a Merse Road, North Moons Moat
Redditch, B98 9HL, UK

Phone 00 800 999 55500

Email informationfallprotection@mmm.com

Web 3M.com/FallProtection


3M is a trademark of 3M Company. EZ-Line™ is a trademark of D B Industries, LLC.
DBI-SALA® is a trademark of Capital Safety Group EMEA.

Registered address: 3M Centre, Cain Road, Bracknell, Berkshire, RG12 8HT. Registered in England and Wales No. 1918922.

Capital Safety Group (EMEA)

Le Broc Center, Bâtiment A, Z.1.1re Avenue – BP15
06511 Carros Le Broc, Cedex, FRANCE

4-Step Installation Takes Only Seconds!

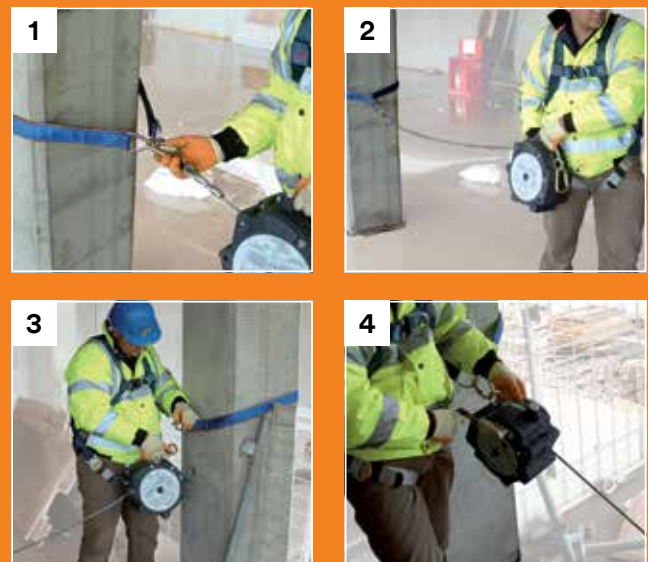

Other equipment shown in this demonstration manufactured by 3M Fall Protection.

7605061		14.96
7605061/A		14.96

EZ-Line Retractable Horizontal Lifeline System, 18 m lifeline, 6.25 mm galvanized cable, tension and impact indicators, and two connecting carabiners.

Specifications

Lifeline: 6.25 mm galvanized 7×19 cable, tensile strength of 24.5 kN. **Housing:** LLDPE Polyethylene. **Carabiners:** Zinc plated steel, 22.2 kN minimum tensile strength. **Anchorage Handle:** Zinc plated. **Capacity:** 2 users per system. Max weight per user weight, including tools & clothes, 141 kg. **Weight:** 11.25 kg. **Size:** 30 cm x 26.25 cm x 18.12 cm. **Standards:** Meets CE (EN795 - C) standards.